





- ADJUST ARM TO PRESSURE DESIRED. 2 TO 20 lbs.
- .06 CENTER PUNCH FOR OPTIONAL DOWELLING 2 PLACES ON BASE
- 1/4-20 x 1/2 SOC. HD. SCREW FURNISHED
 (2) DOWELS AND SLIDE NOT FURNISHED
 DISTRIBUTED BY


- AUTOMATICALLY PUSHES MATERIAL TO POSITIVE LOCATION AS DIE CLOSES VIA SLIDE (Not Furnished)
- AS THE DIE IS OPENED THE MATERIAL IS RELEASED FOR EASY FEEDING OF STOCK STRIP



TRACING TEMPLATES ON REVERSE SIDE
*PATENT PENDING

MADE IN U.S.A.

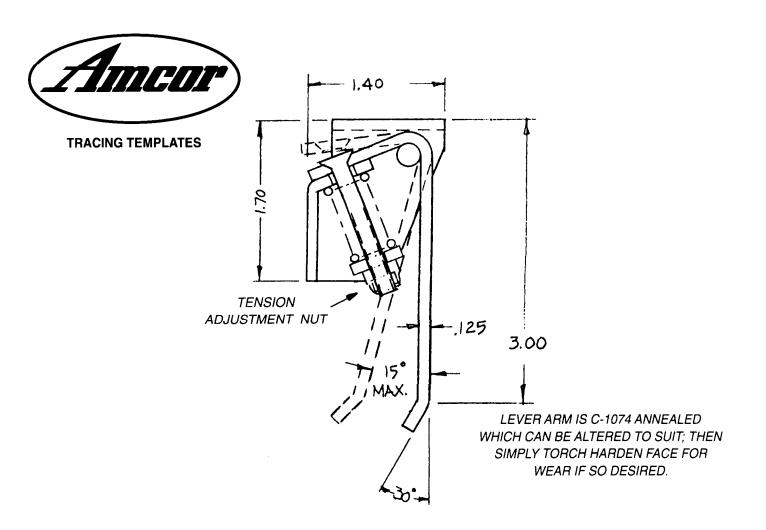

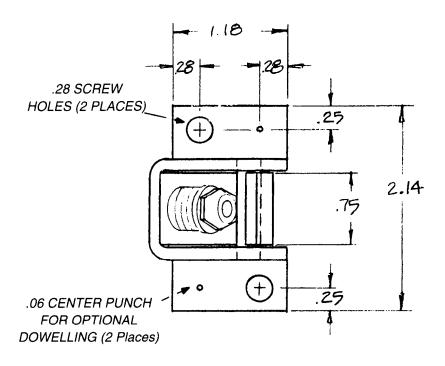

MADE IN U.S.A.